


Folded menu layout template for print preparation

printonline.lv

A4 folded / A3 open / thin lamination

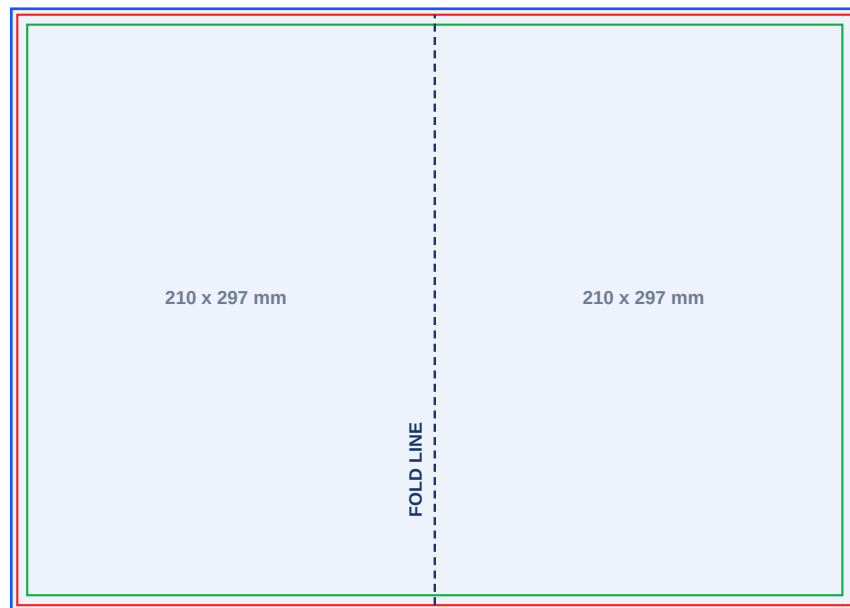

Open / final size: 420 x 297 mm (A3)


Folded size: 210 x 297 mm (A4)

Layout with bleed: 426 x 303 mm




Blue line - bleed / layout size

Extend the background to this line to avoid white edges after trimming.



Red line - trim line / open final size

The open menu will be cut to 420 x 297 mm along this line.



Green line - safe zone

Keep important text, logos and design elements inside this area.



Dashed line - fold line

The menu folds here. Keep important elements at least 5 mm away from the fold line.

Print file requirements

- Resolution - at least 300 DPI at print size
- Color mode - CMYK
- Scale - 1:1
- Fonts - convert to outlines / curves
- Crop marks are not required
- Supply as a 2-page PDF: outside spread + inside spread
- Page 1 outside: back cover on the left, front cover on the right
- Page 2 inside: inside left panel on the left, inside right panel on the right
- Accepted file formats - PDF, TIFF, JPG
- Delete or hide this instruction layer before sending the final print file.

If a specific product page contains additional requirements, those requirements take priority.